



FIG. 1

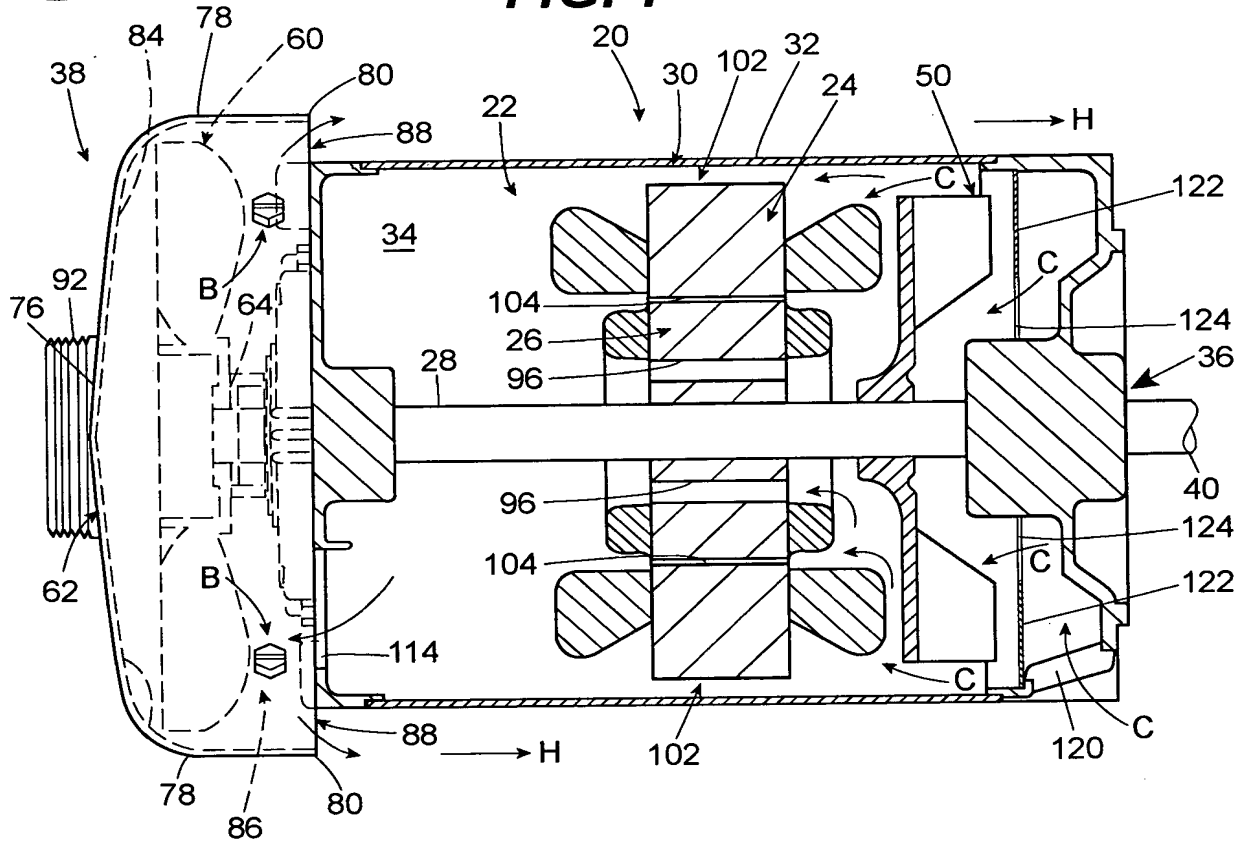


FIG. 2A

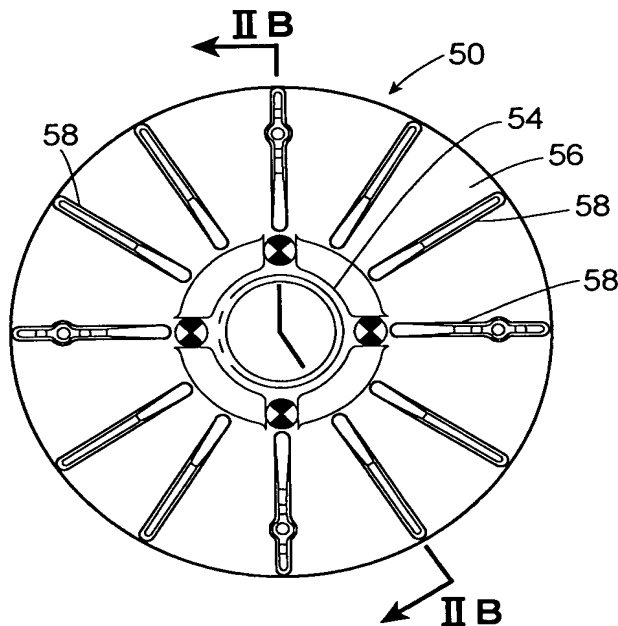


FIG. 2B

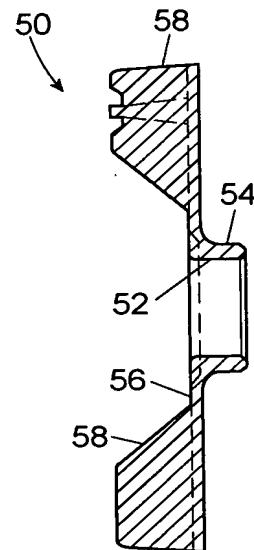




FIG. 3

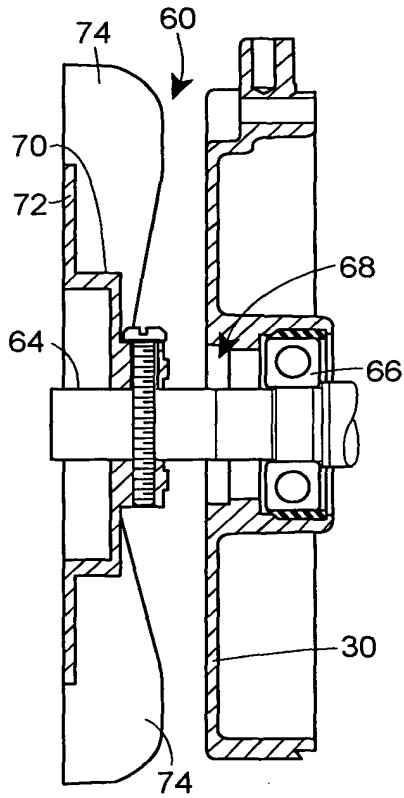


FIG. 4

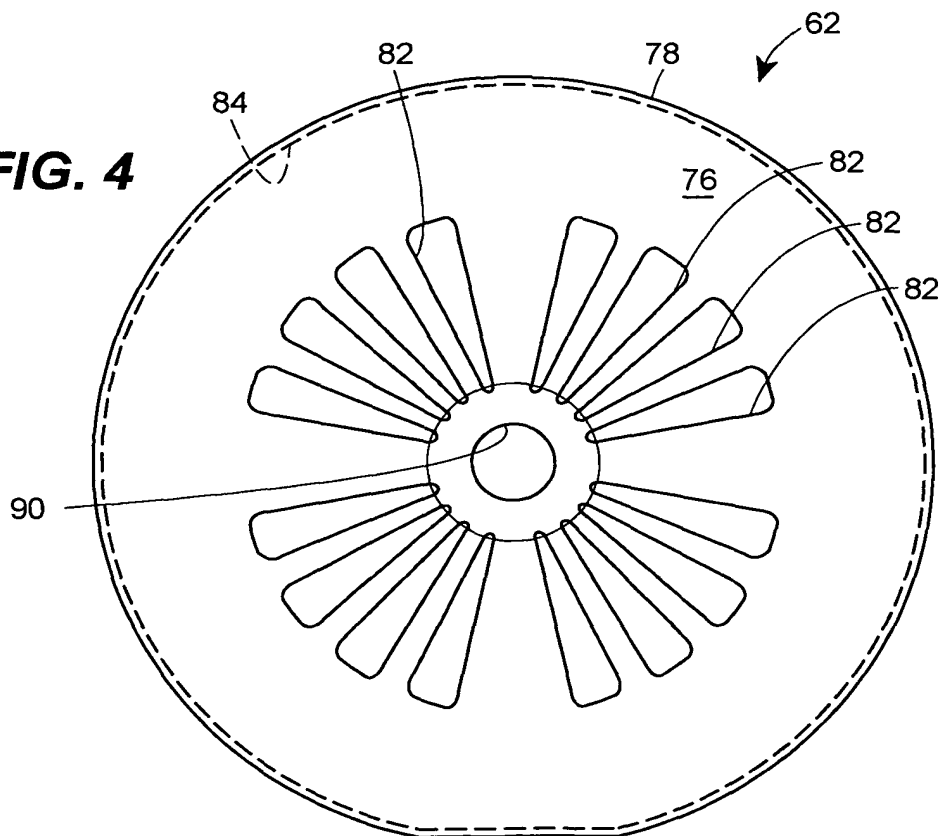




FIG. 5A

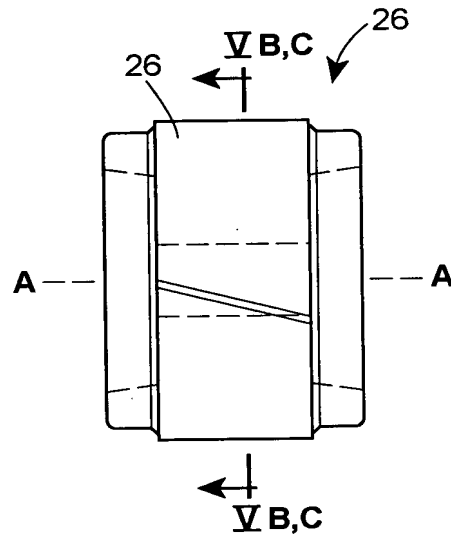


FIG. 5B

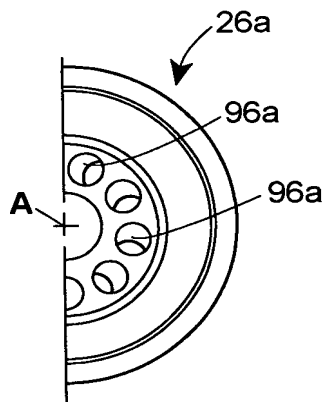


FIG. 5C

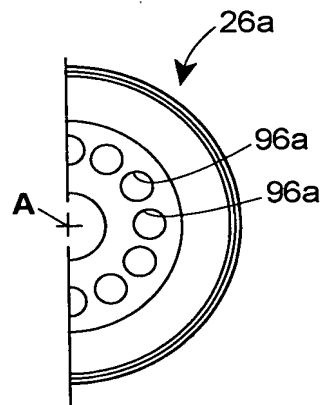




FIG. 6

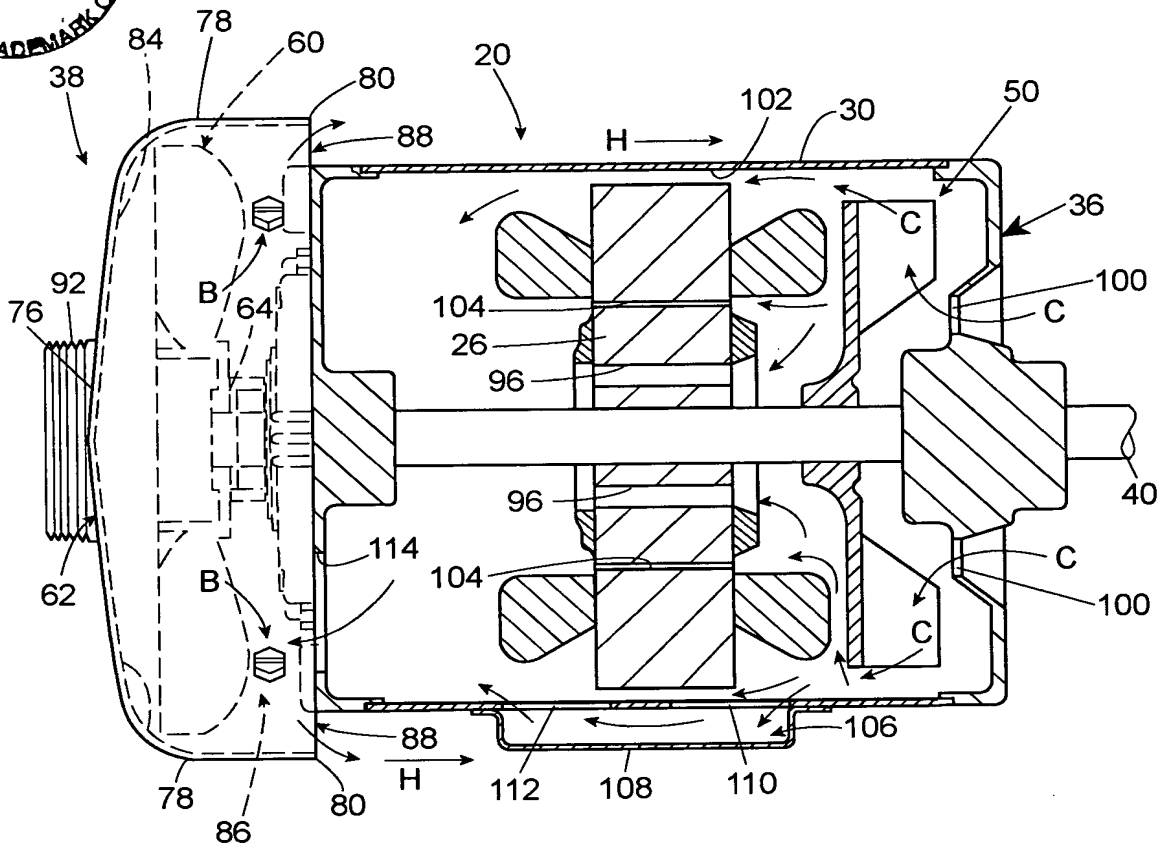


FIG. 7

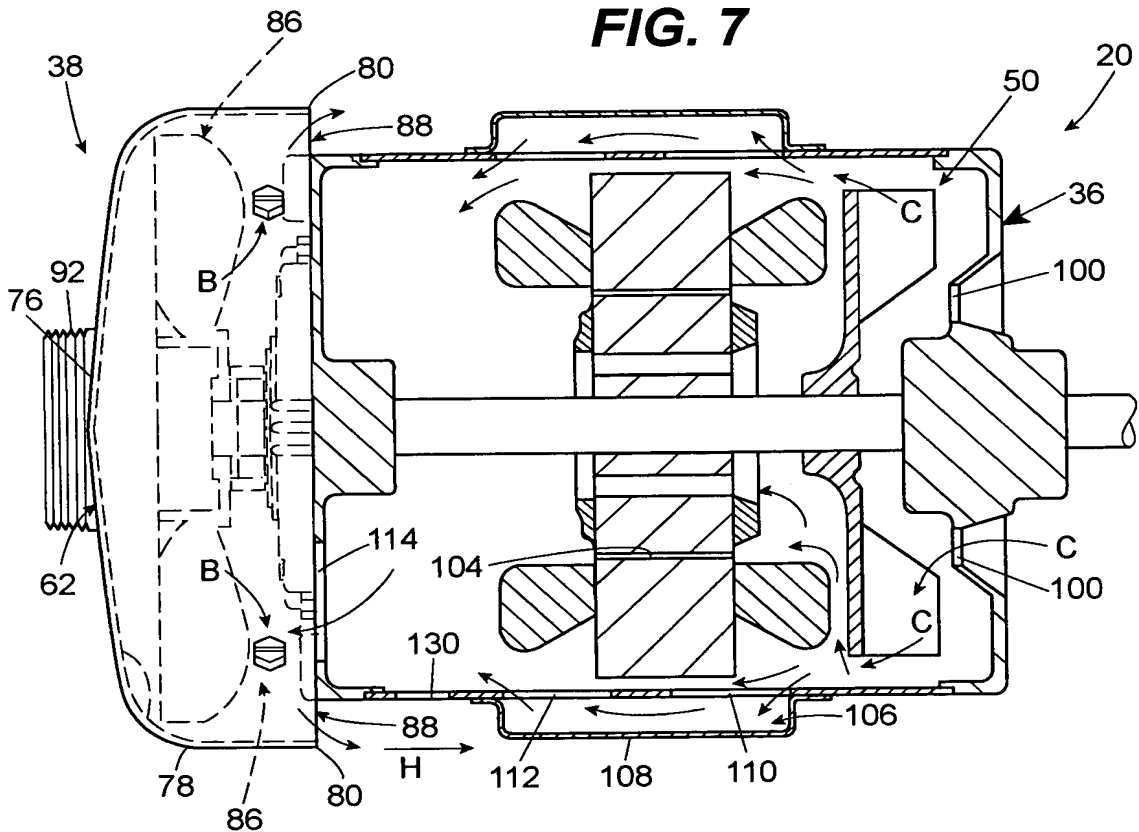




FIG. 8

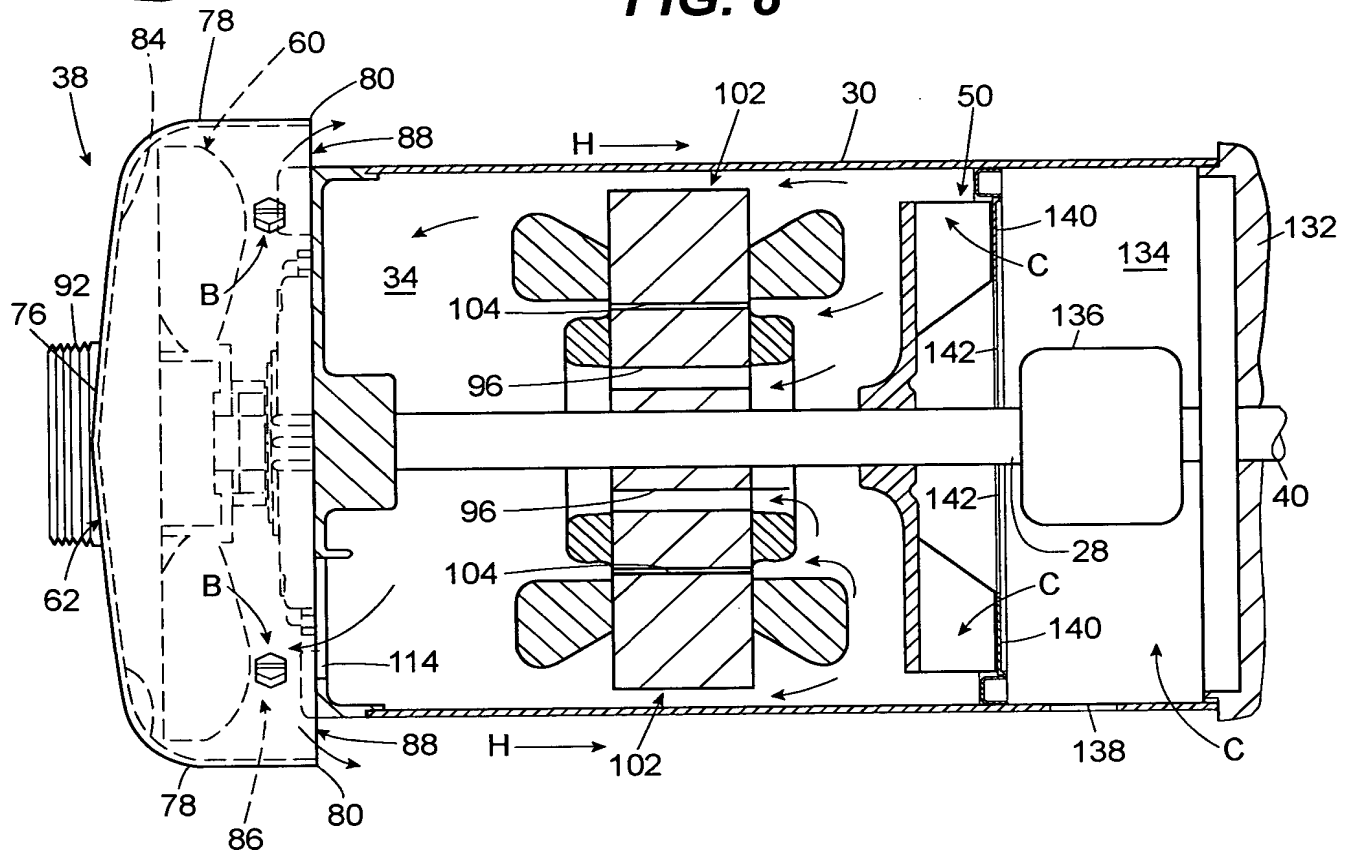


FIG. 9

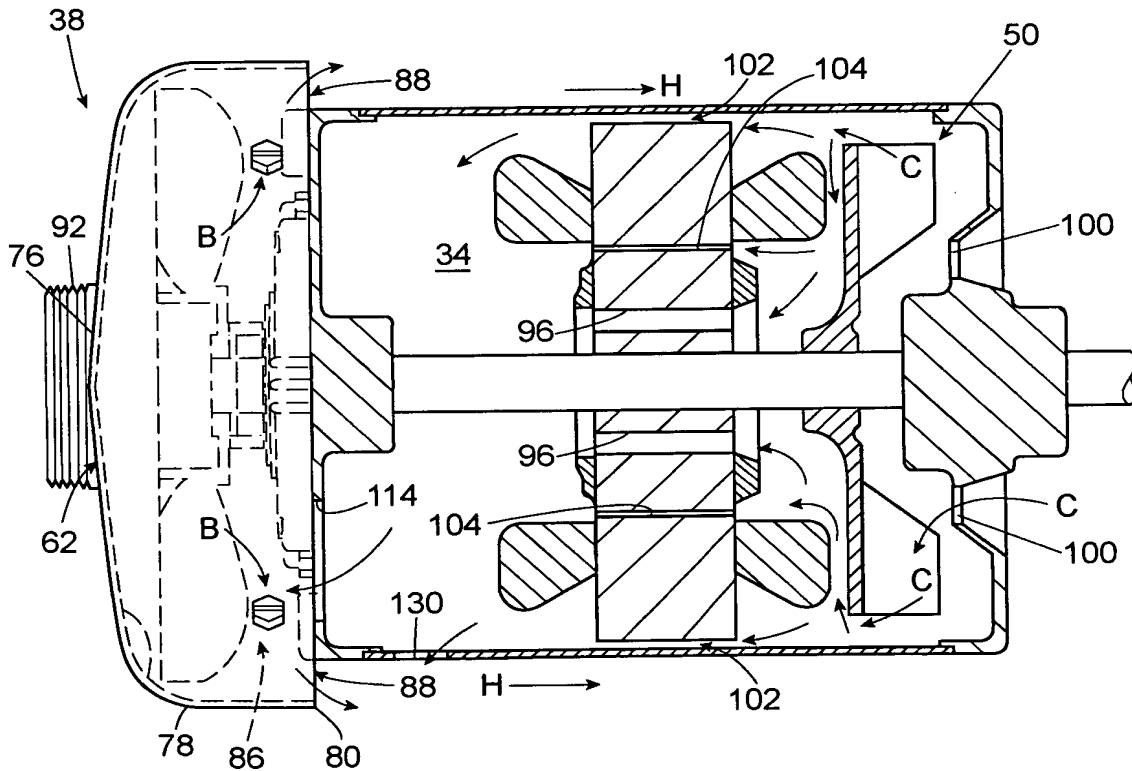




FIG. 10

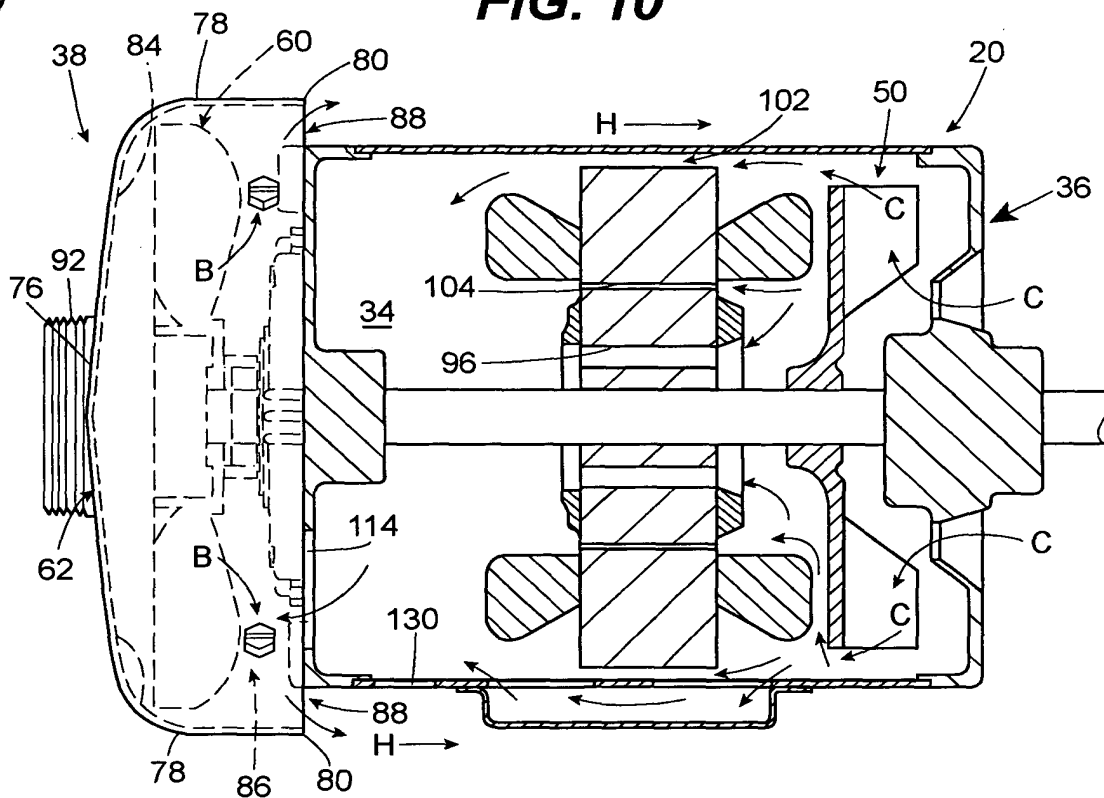


FIG. 11

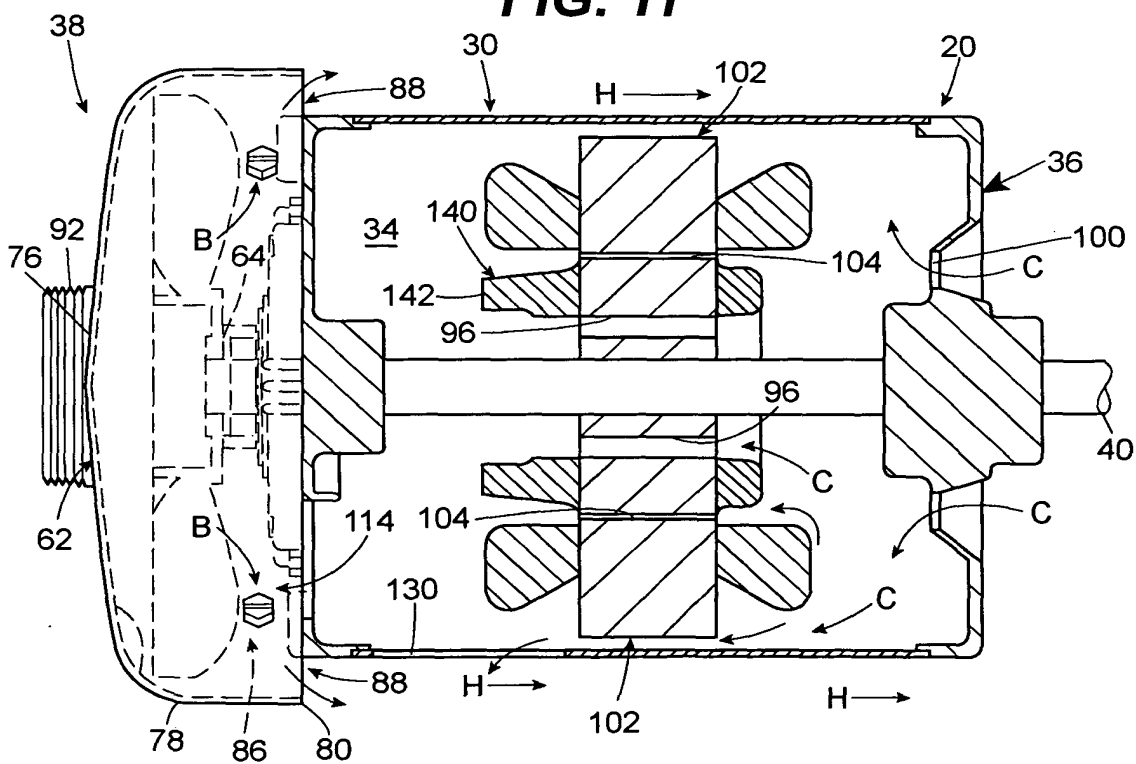




FIG. 12

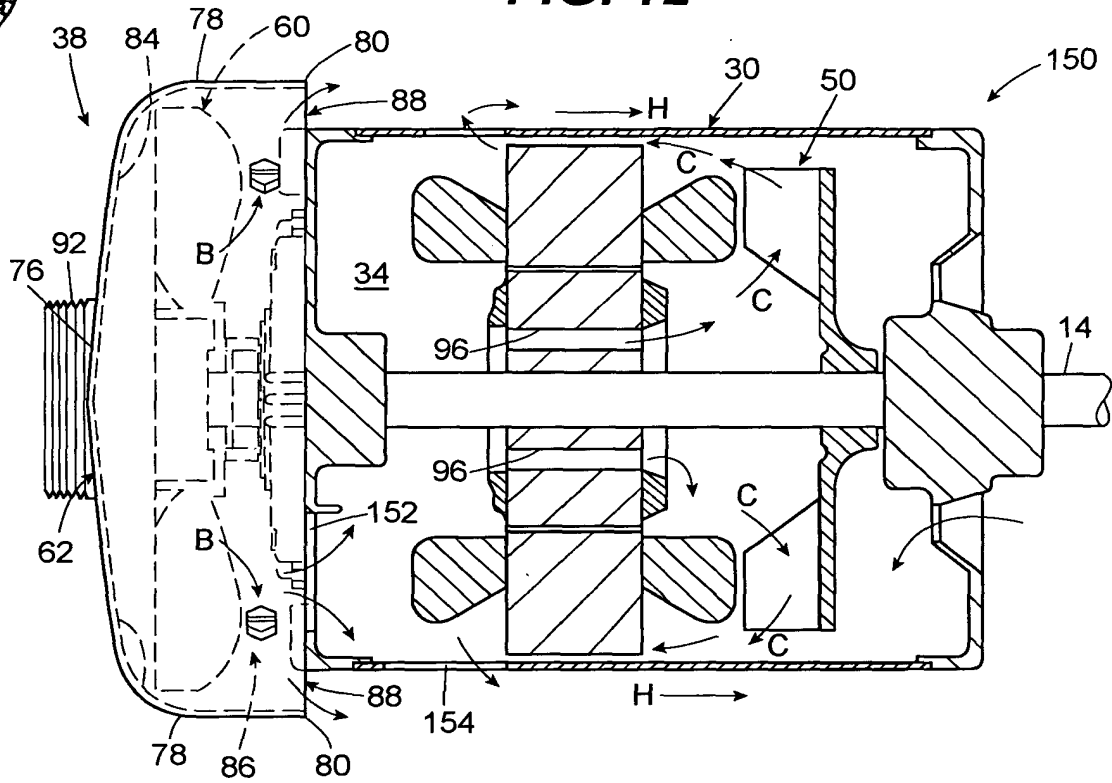


FIG. 13

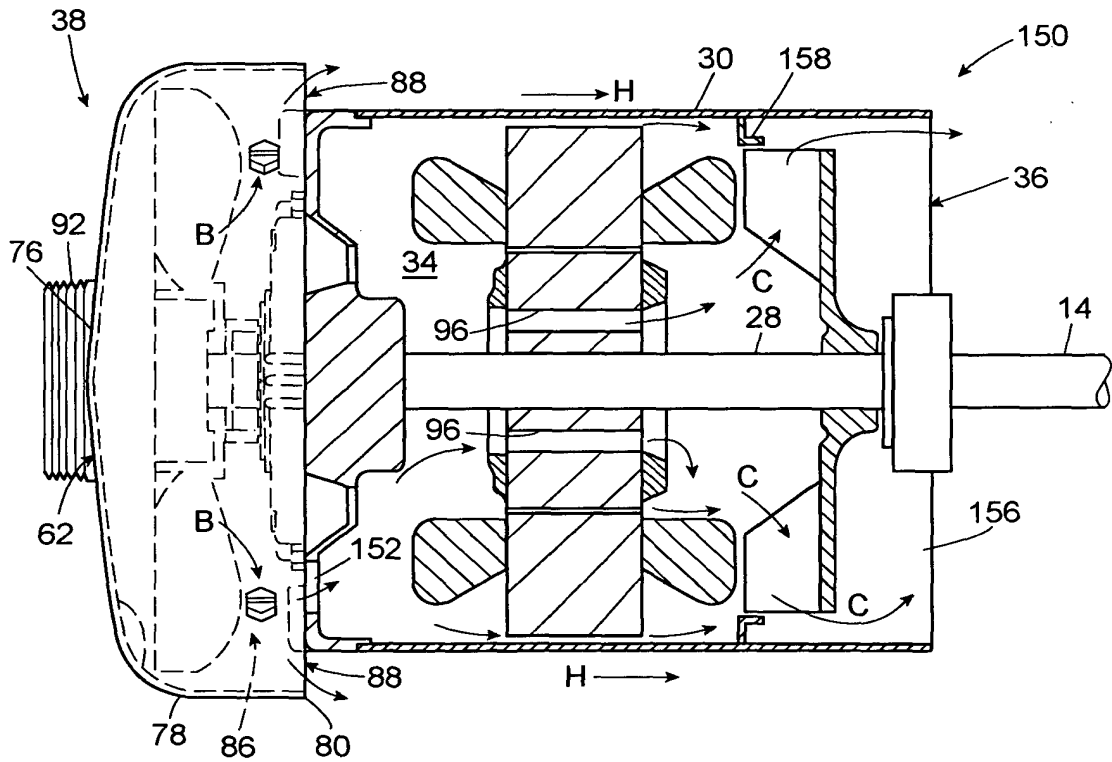


FIG. 13 is a cross-sectional view of a mechanical assembly 200. A central shaft 50 is supported by bearings 114 and 120. A component 202 is on the left, with dashed lines and arrows 'B' indicating a path. Arrows 'H' indicate horizontal movement. A component 204 is at the bottom left.